


NOTE: Cowl not provided if flanged outlet

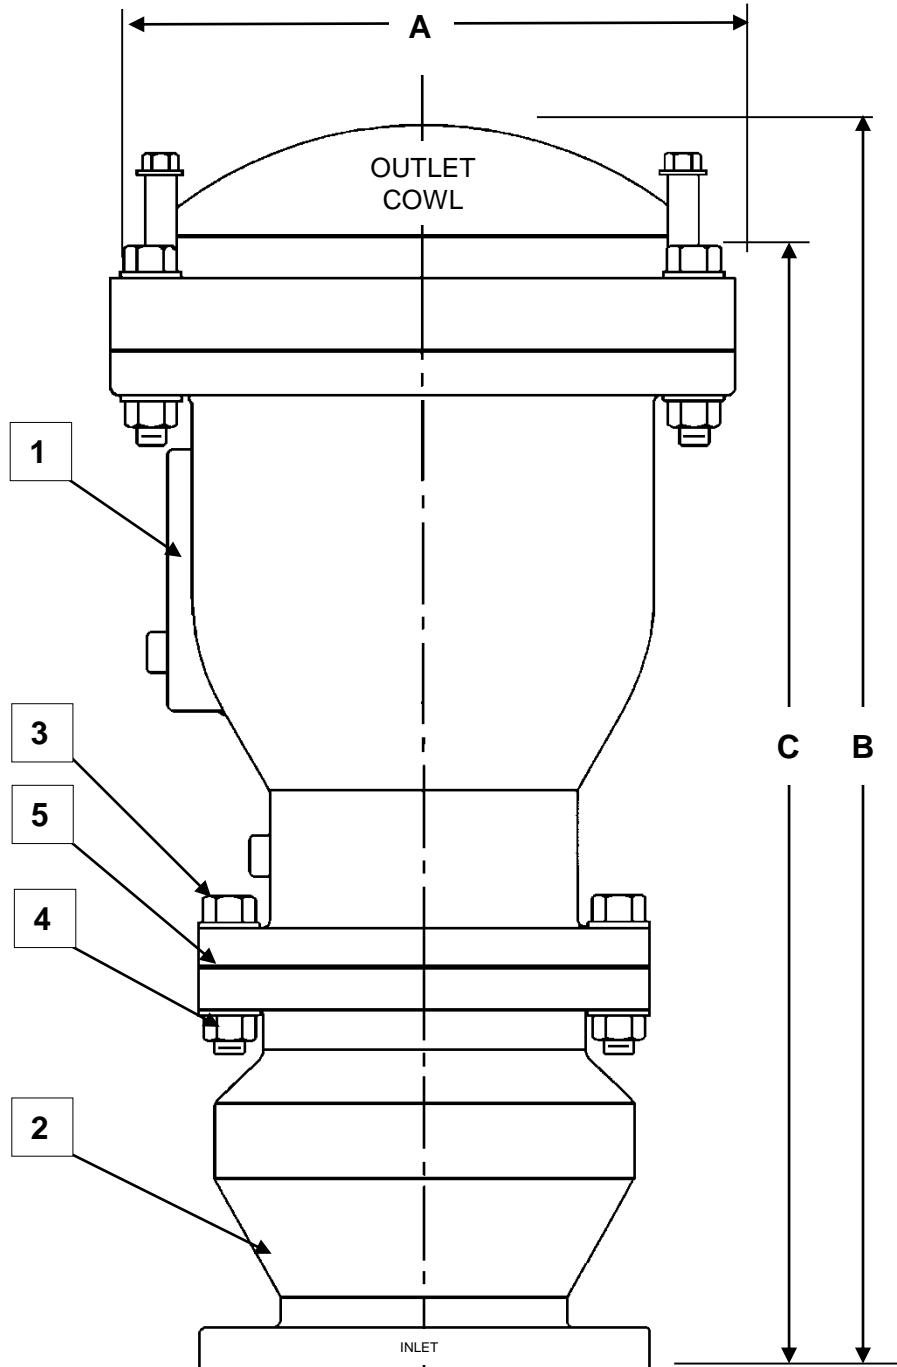

PARTS LIST

Part	Name	Material
1	Figure 930 Air & Vacuum Valve	6" to 8" - Drawing EAV-7049-W 10" to 12" - Drawing EAV-7050-W
2	Figure 284 Surge Check Valve	Drawing C-7029-W
3	Bolt	Steel, ASTM A307
4	Nut	Steel, ASTM A307
5	Gasket	Composition

SIZE	A	B	C (No Cowl)	WEIGHT
6"	15-1/4"	30-1/2"	27-1/2"	250 lbs
8"	19"	37-3/4"	35-1/4"	470 lbs
10"	23-1/2"	47-1/4"	41-1/4"	675 lbs
12"	27-1/2"	51-3/4"	45-3/4"	945 lbs

FIGURE NUMBER	INLET FLANGE	OUTLET	MAXIMUM WORKING PRESSURE	PRESSURE RATING	HYDRO TEST PRESSURE
931-DC	ANSI CLASS 125	COWL	150 PSI	150 PSI	225 PSI
931-DJ	ANSI Class 125	ANSI Class 125	150 PSI	150 PSI	225 PSI

FIGURE 931 AIR & VACUUM VALVES ARE MANUFACTURED AND TESTED IN ACCORDANCE WITH AWWA C512

GA INDUSTRIES , a VAG Brand		
DATE: 5-28-19	DRAWN BY: WJN	
6" to 12" SLOW-CLOSING AIR VACUUM VALVE WITH SURGE CHECK		
Figures 931-DC, 931-DJ	DRAWING NO. EAV-7245-W	REV A